


### 应用范围 Application

- ▶ 大会议厅、中小型多功能厅主扩声、中小型流动演出主扩声、大型扩声系统辅助扩声
- ▶ Main sound for Large conference hall, Small and medium sized multi-function hall, main sound of small and medium-sized touring performance, and supporting fills of large-scale sound-amplifying system

### 产品特性 Features

- ▶ GTS26SA是一款单12寸紧凑型线阵列有源低频音箱,内置3通道有源功放模块(1500W/8Ω×1;600W/8Ω×2),带DSP(1进3出)数字音频处理功能,内置可保存及调用预置程序;拥有高声压级输出和高保真扩声性能,搭配GTS26线阵列音箱组合吊挂或地面组合堆叠式使用,配置了两个力学优化式抽手,表面采用聚脲喷涂工艺,更结实耐磨。
- ▶ GTS26SA is single 12-inch compact line array active subwoofer, inside has 3-channel power amplifier module (1500W/8Ω-1; 600W/8Ω-2) with DSP(1-in 3 out); with high sound pressure level output and high-fidelity sound reinforcement performance, The system can be hanged or stacked on the ground. Speaker box equipped with two handles, and adopts polyurea coating process, which is more strong and wear-resistant.

### 产品尺寸 Product dimension

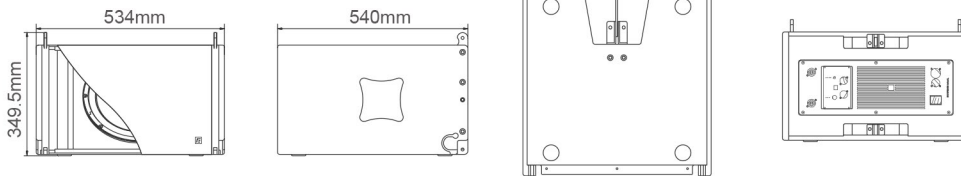

### 参数规格 Specifications

系统类型	单12寸带DSP有源超低频音箱	System type	Active Single 12 inch Subwoofer with DSP
灵敏度(1W/1m)	96dB	Sensitivity(1W/1m)	96dB
频率响应	40Hz-300Hz(±3dB)/35Hz-350Hz(-10dB)	Frequency response	40Hz-300Hz(±3dB)/35Hz-350Hz(-10dB)
额定功率(AES)	1000W	Power rating(AES)	1000W
最大声压级(连续/峰值)	125dB/131dB	SPL(continuous/peak)	125dB/131dB
标称阻抗	8Ω	Nominal Impedance	8Ω
低音单元	12寸低音(100mm音圈)	LF	12"(100mm Voice coil)
连接件	2×Neutrik NL4 Speakon 四芯插座 (1+ 1-); 1×Neutrik XLR IN; 1×Neutrik XLR OUT; 1×RJ45网络控制接口; 2×Neutrik Powercon IN/OUT	Connectors	2×Neutrik 4 PIN socket (1+ 1-); 1×Neutrik XLR IN; 1×Neutrik XLR OUT; 1×RJ45 internet control interface; 2×Neutrik Powercon IN/OUT
3通道D类放大器模块	输出功率4Ω: 750W×2;	3 Channel Class D amplifier module,	Power output 4Ω: 750W×2
带DSP (1进3出)	输出功率8Ω: 600W×2; 1500W×1;	with DSP(1in 3out)	Power output 8Ω: 600W×2; 1500W×1
增益	38dB	Gain	38dB
信噪比S/N	115dB(A计权)	SNR	115dB(A)
工作电压范围	AC100-240V, 50/60Hz	Working voltage range	AC100-240V,50/60Hz
尺寸(H×W×D)	349.5×534×540mm	Dimension(H×W×D)	349.5×534×540mm
重量	28kg	Weight	28kg

