

## 应用范围 Application

- ▶ 多功能厅、宴会厅、商务会议厅、酒吧、豪华包房
- ▶ Multi-function hall, banquet hall, conference room, rock bar


## 产品特性 Features

▶ KT系列是新一代设计紧凑高清晰度全频音箱，拥有四款尺寸规格，包含8寸、10寸、12寸、15寸全频，配置了可旋转90度扩散号角，可根据音箱安装方式灵活调整覆盖范围，同时满足主扩、辅助及舞台返听的使用需求，具有“多场合、多用途”的应用特点。


▶ 箱体采用高强度桦木复合板，箱体底部配有支撑底托和每个面都设计有隐藏吊点，可满足悬挂、壁挂、支撑安装使用。

▶ KT series is a new generation of full-range speakers with four sizes, including 8"10"12"15", equipped with 90° rotation diffusion horn, which can flexibly adjust the coverage in terms of the installation. With the application characteristics of "multi-occasion and multi-purpose".

The box is made of high-strength birch composite board, the bottom of the box is collocated with a support bracket and each side is designed with underlying lifting points.

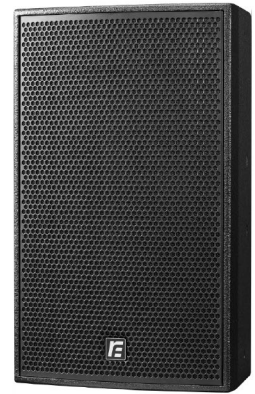

## 产品尺寸 Product dimension

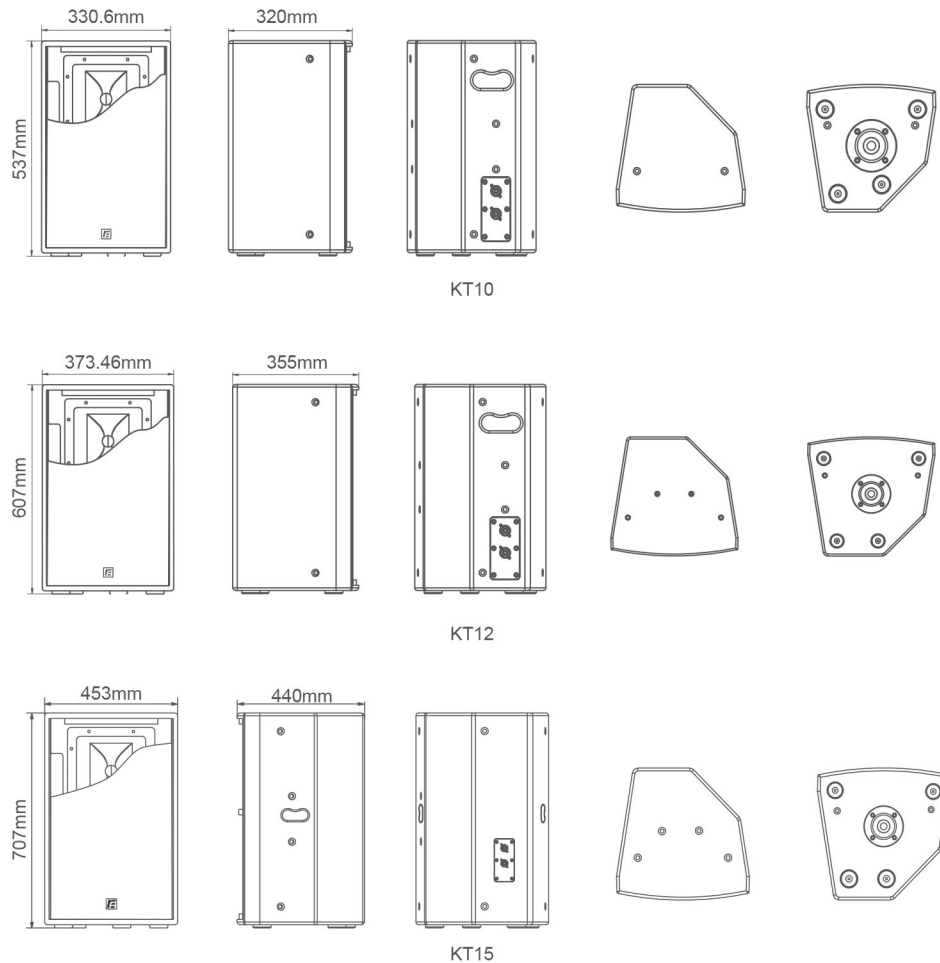

# KT10/KT12/KT15

单 10/12/15 寸二分频全频音箱

Single 10" /12" /15" Two-Way Full-Range Speaker

# KT SERIES

## 参数规格 Specifications

型号	KT10	KT12	KT15
系统类型	单10寸二分频全频音箱	单12寸二分频全频音箱	单15寸二分频全频音箱
灵敏度(1W/1m)	96dB	97dB	98dB
频率响应	70Hz~20kHz(±3dB) / 60Hz~20kHz (-10dB)	65Hz~20kHz(±3dB) / 60Hz~20kHz (-10dB)	60Hz~20kHz(±3dB) / 50Hz~20kHz (-10dB)
标称阻抗	8Ω	8Ω	8Ω
额定功率 (AES)	250W	350W	450W
低音单元	10寸 铝盆架铁磁单元	12寸 铝盆架铁磁单元	15寸 铝盆架铁磁单元
高音单元	1.75寸(1寸喉口)压缩驱动器(44mm音圈)	1.75寸(1寸喉口)压缩驱动器(44mm音圈)	1.75寸(1寸喉口)压缩驱动器(44mm音圈)
覆盖角度(H×V)	90°×60°(可旋转号角)	90°×60°(可旋转号角)	90°×60°(可旋转号角)
最大声压级(连续/峰值)	120dB/126dB	123dB/129dB	125dB/131dB
连接件	2×NEUTRIK NL4MP四芯插座, 1+1-	2×NEUTRIK NL4MP四芯插座, 1+1-	2×NEUTRIK NL4MP四芯插座, 1+1-
吊挂硬件	M8吊点×14、35mm底托	M8吊点×16、35mm底托	M8吊点×14、35mm底托
尺寸(H×W×D)	537×330.6×320mm	607×373.46×355mm	707×453×440mm
重量	15kg	19kg	27kg

ITEM NO.	KT10	KT12	KT15
System type	Single 10" Two-way Full-range speaker	Single 12" Two-way Full-range speaker	Single 15" Two-way Full-range speaker
Sensitivity(1W/1m)	96dB	97dB	98dB
Frequency response	70Hz~20kHz(±3dB) 60Hz~20kHz (-10dB)	65Hz~20kHz(±3dB) 60Hz~20kHz (-10dB)	60Hz~20kHz(±3dB) 50Hz~20kHz (-10dB)
Nominal impedance	8Ω	8Ω	8Ω
Power rating(AES)	250W	350W	450W
LF	10" aluminum basket ferrit magnet unit	12" aluminum basket ferrit magnet unit	15" aluminum basket ferrit magnet unit
HF	1.75" (1 inch)compression driver(44mm voice coil)		
Dispersion(H×V)	90°×60°(rotatable horn)		
SPL(continue/peak)	120dB/126dB	123dB/129dB	125dB/131dB
Connectors	2×NEUTRIK NL4MP four core socket, 1+1-		
Fittings	M8 rigging points×14 35mm tray at the bottom	M8 rigging points×16 35mm tray at the bottom	M8 rigging points×14 35mm tray at the bottom
Dimension(H×W×D)	537×330.6×320mm	607×373.46×355mm	707×453×440mm
Weight	15kg	19kg	27kg



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号  
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10,Shilou Section,Shilian Road,Panyu District,Guangzhou,Guangdong,China  
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com