

应用范围 Application


- ▶ 会议室、礼堂、宴会厅、音乐厅、教堂、酒吧主扩声、中小型流动系统的主扩声、辅助扩声
- ▶ Conference room, Auditorium hall, Banquet Hall, Concert Hall, Church, FOH for Bars, FOH for medium and small touring system

产品特性 Features

- ▶ 采用高性能革新铝材质箱体设计，坚凑小巧，性能卓越，在保证轻盈的同时具有坚韧的品质，内置4×4寸中低音单元和1个1.25寸高音单元，子弹头式高音相位塞搭配80×40指向小号角扩散设计，能在极高声压级和更宽的频率响应下提供高清晰度的声音；中低音为锥型盆，橡胶悬边，搭配高频单元，提供听感更细腻、声音层次感表现丰富的扩声。
- ▶ 紧凑型小箱体具备高声压级输出，高保真扩声性能，并且可以多只组成垂直阵列，拥有安装方便快捷的特性，专为固定安装和小型流动扩声系统提供高清晰度解决方案。
- ▶ Adopts high performance innovative aluminium enclosure design, small size, excellent performance, the quality is durable while lightweight, with built-in 4x4" LF unit and 1x2" HF unit, provide smooth frequency response curve and broad dispersion, ensure the high speech intelligibility and high fidelity.
- ▶ Compact enclosure with high sound pressure output, make sure high fidelity sound performance, and can form multiple vertical array, easy and fast installation, designed for providing high definition solution for fixed installation and small touring system.



产品尺寸 Product dimension

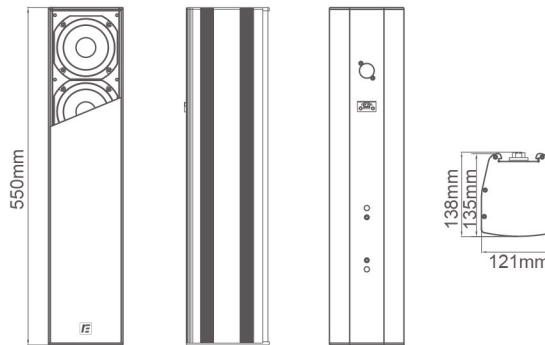

参数规格 Specifications

| | | | |
|---------------------|--------------------------------------|-------------------------------|---|
| 系统类型 | 4×4寸二分频音箱 | System | 4×4" Two-way speaker |
| 灵敏度(1W/1m) | 97dB | Sensitivity(1W/1m) | 97dB |
| 频率响应 | 160Hz~19kHz(±2dB)/140Hz~20kHz(-10dB) | Frequency response | 160Hz~19kHz(±2dB)/140Hz~20kHz(-10dB) |
| 额定功率(AES) | 190W | Power rating(AES) | 190W |
| 最大声压级(连续/峰值) | 118dB/124dB | SPL(Continunous /Peak) | 118dB/124dB |
| 标称覆盖角(H×V) | 80°×40° | Dispersion(H×V) | 80°×40° |
| 标称阻抗 | 8Ω | Normal impedance | 8Ω |
| 低频单元 | 4×4"全频单元(1"音圈) | LF | 4×4"full range unit(1" Voice Coil) |
| 高频单元 | 1×1.25", 32mm压缩单元 | HF | 1×1.25", 32mm compression driver |
| 连接件 | 1×四芯音箱插座1+ 1-, 1×2PIN凤凰插座, 1+2- | Connector | 1×4 core socket 1×2 PIN phoenix socket ,1+ 2- |
| 吊挂硬件 | 2×M8吊点 | Fittings | 2×M8 rigging points |
| 尺寸(H×W×D) | 550×121×138mm | Dimension(H×W×D) | 550×121×138mm |
| 重量 | 7kg | Weight | 7kg |

