




## 应用范围 Application

- ▶ 多功能厅堂、宴会厅、商务会议、酒吧、辅助、舞台返送、侧返送、台唇补声
- ▶ Multi-function Hall, Banquet Hall, Meeting room, Rock Bar, Stage Monitor, Side monitor

## 产品特性 Features

- ▶ TX25 PRO 是一款高效紧凑双5寸二分频扬声器，采用欧洲进口喇叭单元，配置了1只 1.4 寸钕磁压缩高音单元，搭配90°×60°平滑度和均匀度一致性极佳的宽指向号筒；配置了2只5寸低音单元，以高音轴线为中心，对称结构紧凑排列设计，它具备声音细节高度还原及声音听感厚实贴脸的听感；同时配置了2个四芯音箱插座及凤凰接线端子，以满足“多场合、多用途”的应用需求。
- ▶ TX25 PRO is a high efficiency compact dual 5" two-way full-range speaker with horns imported from European, equipped with a 1.4-inch neodymium compressed HF unit, an excellent smoothness and evenness 90°×60° wide-pointing horn, as well as equipped with two 5-inch ferrite LF units, with the high pitch as the center axis, and in a symmetrical structure compact arrangement design. TX 25 PRO has the sound details highly restored and the sound feeling thick sense of listening, with 2×4pin socket and Phoenix terminal to meet more occasion and multi-use application.

## 产品尺寸 Product dimension

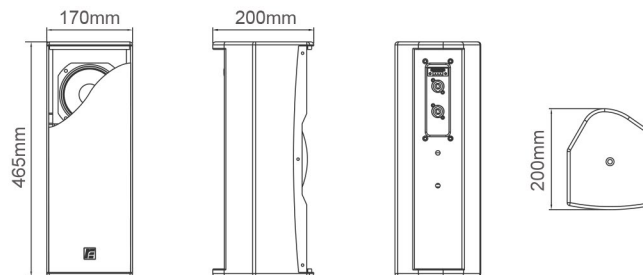

## 参数规格 Specifications

系统类型	双5寸二分频全频音箱	System type	Dual 5" Two-way Full-range speaker
灵敏度(1W/1m)	95dB	Sensitivity(1W/1m)	95dB
频率响应	90Hz~18KHz(±3dB) / 85Hz~19KHz (-10dB)	Frequency response	90Hz~18KHz(±3dB) / 85Hz~19KHz (-10dB)
标称阻抗	4Ω	Nominal impedance	4Ω
额定功率 (AES)	160W	Power rating (AES)	160W
低音单元	2×5寸 铁磁低音单元 (32mm)	LF	2×5" Ferrite LF (32mm)
高音单元	1×1.4寸 钕磁高音单元 (36mm)	HF	1×1.4" neodymium HF (36mm)
覆盖角度(H×V)	90°×60°	Dispersion(H×V)	90°×60°
最大声压级(连续/峰值)	117dB/123dB	SPL(continue/peak)	117dB/123dB
连接件	2×NEUTRIK NL4MP四芯插座 (1+1-) / 1×4针接线端子, IN(1+3-)/OUT(2+4-)	Connector	2×NEUTRIK NL4MP 4pin socket (1+1-) / 1×4 Pin terminal, IN(1+3-)/OUT(2+4-)
尺寸(H×W×D)	465×170×200mm	Dimension(H×W×D)	465×170×200mm
重量	7.2kg	Weight	7.2kg

