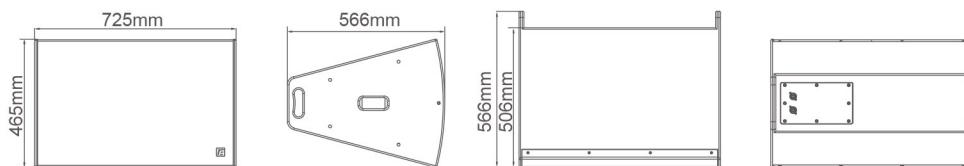


应用范围 Application 

▶ 剧场、礼堂、宴会厅主扩声、大会议厅、多功能厅主扩声、流动演出、体育场馆主扩声、大型扩声系统辅助扩声
 ▶ Stadium, Theatre, Auditorium, Banquet hall, Multi-function hall, Touring, Portable application, Supporting large-scale sound reinforcement system fills

产品特性 Features 

▶ VR15-30设计秉承了VR系列灵活多变的设计风格，具备水平阵列、垂直阵列或堆叠组合多种模式，还包含多项细节改良及全新技术；采用1×3寸进口高音单元，高频部分集成了相位和声音波导技术，使其具有线性指向覆盖及均匀一致性更高的声压级能量，并提供了垂直指向30°和10°两款型号供选择，能同时满足近场和远场扩声覆盖需求；低频采用了15寸低音单元，集成了新型声波导向相位塞，有效拓展了中频的工作带宽，使中低音和高音驱动器的声波紧密耦合，最大限度地保持了中频音色的一致性，同时具有快瞬态响应和干净有力的低频动态能量。
 ▶ 采用全新简易阵列组合安装吊挂设计方式，为固定扩声系统提供最佳简化便捷组合方案；箱体上还配置了4个力学优化式抽手，让搬运和快速搭建工作变得更加简易便捷。
 ▶ VR15-30 design follows the flexible style of VR series, with horizontal array, vertical array or stack combination modes, including various of detailed improvement and new technologies; adopts a 3-inch imported HF unit, the high frequency section integrates phase and acoustic wave-guide technology, which makes a liner direction coverage and consistency of higher sound pressure energy, and provides a vertical pointing 30° and pointing 10° two types for choose. Low frequency adopts a 15-inch LF unit to integrate new acoustically guided phase plug, effectively expands the middle frequency working bandwidth, making sound waves of both mid-bass and high pitch drivers close coupling and containing maximum consistency of mid-range tone, as well as with fast transient response and clean, powerful low frequency dynamic energy.
 ▶ VR15-30 adopts new simple array combination installation fittings design, provide the best simplification and convenience project to fix amplifier system; enclosure equipped with 4 draw hands which make the transportation and quick build working more convenient.

产品尺寸 Product dimension 参数规格 Specifications 

系统类型	单15寸二分频阵列音箱	System	Single 15" Two-way Line Array Speaker
频率响应	65Hz~19kHz(±3dB) 60Hz~20kHz(-10dB)	Frequency response	65Hz~19kHz(±3dB) 60Hz~20kHz(-10dB)
灵敏度(1w 1m)	100dB	Sensitivity(1w 1m)	100dB
标称阻抗	8Ω	Nominal impedance	8Ω
额定功率(AES)	450W	Power rating (AES)	450W
最大声压级(连续/峰值)	125.3dB/137.4dB	SPL(continuous/peak)	125.3dB/137.4dB
覆盖角度(H×V)	90°×30°	Dispersion(H×V)	90°×30°
低音单元	1×15寸铁磁低音	LF	1×15" Ferrite LF
高音单元	1×3寸铁磁高音	HF	1×3" Ferrite HF
连接方式	2×NEUTRIK NL4MP四芯插座, 1+1-	Connectors	2×NEUTRIK NL4MP, 1+1-
吊挂硬件	M10吊点×8	Fittings	8×M10 Fittings
尺寸(H×W×D)	465×725×566mm	Dimension(H×W×D)	465×725×566mm

