



应用范围 Application


- ▶ 剧院、礼堂、宴会厅、音乐厅、酒吧
- ▶ Theatre, Auditorium, Banquet hall, Music hall, Bar

产品特性 Features

▶ WA118SA采用18寸进口钕磁低音单元(4"音圈);内置3通道有源功放模块(1500W/8Ω×1;600W/8Ω×2),带DSP(1进3出)数字音频处理功能,内置可保存及调用预置程序;是一款通用型有源超低频音箱,可以与任何全频音箱灵活组合使用,安装方便快捷,专为固定安装和小型流动扩声系统提供高清晰度解决方案。

▶ WA118SA USES 18 "imported neodymium magnetic bass unit (4" voice coil); Built-in 3 channel active power amplifier module (1500w/8Ω×1;600w/8Ω×2), with DSP (1 in 3 out) digital audio processing function, built-in presets can be preserved or loaded; It is an universal active ultra-low frequency speaker, which can be flexibly combined with any full-frequency speaker, and is convenient and fast to install. It is designed to provide high definition solutions for fixed installation and small mobile sound amplification system.

产品尺寸 Product dimension

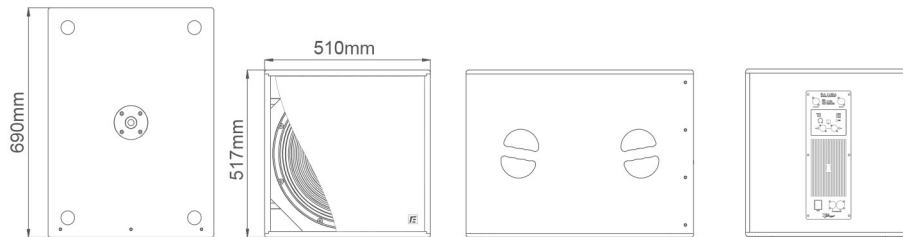

参数规格 Specifications

系统类型	单18寸(带DSP)有源超低频音箱	System type	Single 18" Active Subwoofer With DSP
灵敏度(1W/1m)	100dB	Sensitivity(1W/1m)	100dB
频率响应	35Hz-300Hz(±3dB)/30Hz-350Hz(-10dB)	Frequency response	35Hz~300Hz(±3dB)/32Hz~350Hz(-10dB)
额定功率(AES)	900W	Power rating(AES)	900W
最大声压级(连续/峰值)	129.5dB/135.5dB	SPL(continue/peak)	129.5dB/135.5dB
标称阻抗	8Ω	Nominal Impedance	8Ω
低音单元	18寸低音	LF	1×18"(4"Voice coil)
吊挂硬件	M20支撑底座	Fittings	M20 Pole Mount Socket
连接件	2×Neutrik NL4 Speakon四芯插座(1+ 1-); 1×Neutrik XLR IN; 1×Neutrik XLR OUT; 1×RJ45网络控制接口; 2×Neutrik Powercon IN/OUT	Connectors	2×Neutrik 4 PIN socket (1+ 1-); 1×Neutrik XLR IN; 1×Neutrik XLR OUT; 1×RJ45 internet control interface; 2×Neutrik Powercon IN/OUT
3通道D类放大器模块,带DSP(1进3出)	输出功率8Ω:600W×2;1500W×1	3 channel Class D amplifier module, with DSP(1in 3out)	Power output 8Ω:600W×2;1500W×1
增益	38dB	Gain	38dB
信噪比S/N	115dB (A计权)	SNR	115dB(A)
工作电压范围	AC 100-240V,50/60Hz	Working voltage range	AC100-240V, 50/60Hz
尺寸(H×W×D)	517×510×690mm	Dimension(H×W×D)	517×510×690mm
重量	39kg	Weight	39kg

