



应用范围 Application


- ▶侧环绕：不超过20米宽的影厅、后环绕：不超过30米深的影厅
- ▶Side surround: Available for area not more than 20m width; Back surround: Area not more than 30m depth.

产品特性 Features

▶PC10 是一款设计用于影院环绕扩声的10寸同轴全频音箱；选了一个同轴结构3寸压缩单元（75mm音圈），10寸（75mm音圈）中低频单元。采用全新处理的钛振膜高音，搭配宽角的指数型高音号筒,覆盖角达到90°(H)×90°(V)指向角度；同时满足了优秀听感和高功率低失真，音质细腻优美；同轴结构设计有效解决了常规音箱单元间的传输路径差问题，远近场听感音色均匀一致；配套专用水平及垂直角度可调壁挂架，简易实用。

▶PC is a 10" coaxial full-range speaker for cinema with a 75mm 3" speaker driver and 10" 75mm MLF speaker. Deployed a new titanium diaphragm tweeter with a widely angle index tweeter is used. The coverage angle is 90° (H) × 90° (V); Meanwhile, equipped with special horizontal and vertical angle adjustable wall hanger, simple as well as practical.

产品尺寸 Product dimension

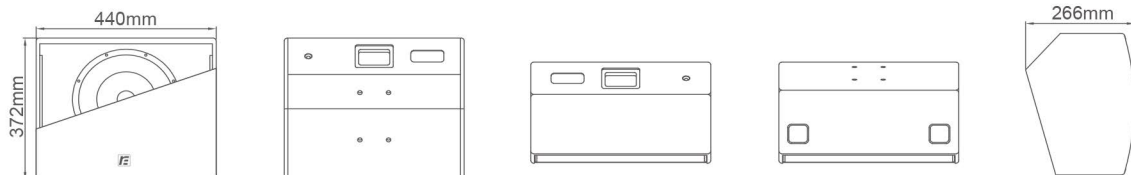

参数规格 Specifications

系统类型	同轴单10"二分频环绕音箱	System type	Coaxial single 10" two-way surround speaker
灵敏度(1W/1m)	94dB	Sensitivity(1W/1m)	94dB
频率响应	60Hz~20kHz(-10dB)	Frequency response	60Hz~20kHz(-10dB)
额定功率(AES)	400W	Power rating(AES)	400W
最大声压级(连续/峰值)	120dB/126dB	SPL(continue/peak)	120dB/126dB
标称覆盖角(H×V)	90°×90°	Dispersion(H×V)	90°×90°
标称阻抗	8Ω	Nominal Impedance	8Ω
低音单元	10"低音(75mm音圈)铁氧体, 铝盆架	LF	1×10" 75mm voice coil (Ferrite, aluminum pot frame)
高音单元	3"压缩单元(75mm音圈)铁氧体	HF	1" The compression unit (75mm voice coil) (Ferrite)
连接件	接线端子(红+、黑-)	Connectors	Red for positive, black for negative
吊挂硬件	4×M8吊点	Fittings	4×M8 rigging point
尺寸(H×W×D)	372×440×266mm	Dimension(H×W×D)	372×440×266mm
重量	16kg	Net weight	16kg

