




应用范围 Application

- ▶ 剧场、礼堂、宴会厅、大会议厅、多功能厅、辅助、舞台返送、侧返送、台唇补声
- ▶ Theatre, Auditorium, Banquet hall, Conference hall, multi-function hall, Stage monitor, Side monitor.


产品特性 Features

- ▶ M12+/M15+ 是一款专门为舞台设计的监听音箱，配置了90°(H)×60°(V)宽角号筒；多功能箱体结构摆放角度(与地面夹角为垂直35°和55°可选)，同时可以满足短距离或长距离的舞台监听；M系列还配置了9个M8吊挂点。
- ▶ M12+/M15+ series is a monitor speaker designed for stage, equipped with 90°(H)×60°(V) horn; Enclosure angle with ground is 55° to 35° optional, satisfied long or short distance stage needs; It has 9×M8 rigging point.

产品尺寸 Product dimension

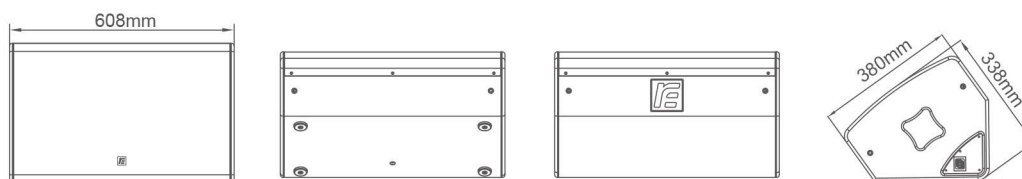

M12+

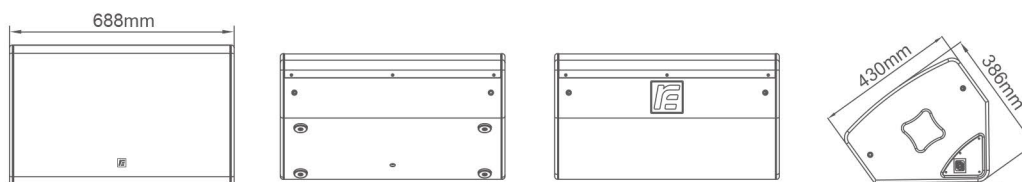

M15+



M12+/M15+

返听音箱

Monitor Speaker

M SERIES

参数规格 Specifications

型号	M12+	M15+
系统类型	单12寸二分频音箱	单15寸二分频音箱
灵敏度(1W/1m)	99dB	100dB
频率响应	50Hz~20kHz(±3dB)/45Hz~22kHz(-10dB)	50Hz~19kHz(±2dB)/45Hz~20kHz(-10dB)
额定功率(AES)	450W	500W
最大声压级(连续/峰值)	125dB/131dB	127dB/133dB
覆盖角度(H×V)	90°×60°	90°×60°
标称阻抗	8Ω	8Ω
低音单元	1×12寸钕磁单元75mm	1×15寸铝盆架纸盆单元
高音单元	1×3寸(1.4寸喉口)压缩驱动器	3寸(1.5喉口)压缩驱动器
连接件	2×NEUTRIK NL4MP 四芯插座, 1+ 1-	2×NEUTRIK NL4MP 四芯插座, 1+ 1-
吊挂硬件	9×M8吊点	9×M8吊点
尺寸(H×W×D)	380×608×338mm	430×688×386mm
重量	21kg	35kg

MODEL NO.	M12+	M15+
System type	Single 12" Two-Way Loudspeaker	Single 15" Two-Way Loudspeaker
Sensitivity(1W/1m)	99dB	100dB
Frequency response	50Hz~20kHz(±3dB)/45Hz~22kHz(-10dB)	50Hz~19kHz(±2dB)/45Hz~20kHz(-10dB)
Power rating(AES)	450W	500W
SPL(continue/peak)	125dB/131dB	127dB/133dB
Dispersion(H×V)	90°×60°	90°×60°
Nominal impedance	8Ω	8Ω
LF	1×12" neodymium unit 75mm	1×15" paper cone speaker with aluminum basket unit
HF	1×3" (1×3" throat)compression driver	3" compression driver
Connectors	2×NEUTRIK NL4MP , 1+ 1-	2×NEUTRIK NL4MP , 1+ 1-
Fittings	9×M8 flying point	9×M8 flying point
Dimension(H×W×D)	380×608×338mm	430×688×386mm
Weight	21kg	35kg



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10,Shilou Section,Shilian Road,Panyu District,Guangzhou,Guangdong,China
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com