




应用范围 Application

- ▶ 剧场、音乐厅、宴会厅、教堂、多功能类大厅主扩声、流动演出、体育场馆主扩声、户外大型广场主扩声
- ▶ Theater, Music Hall, Banquet Hall, Church, Main Sound Reinforcement for Multi-function Hall, Touring Show, Gymnasium, Outdoor Large Square

产品特性 Features

- ▶ WA18H是一款紧凑型线阵列超低音箱, 采用了单18寸钕磁超低音单元和配置了高强度吊挂配件, 可以和全频线阵列音箱VK210/GTS28/GTS310组合吊挂或地面组合堆叠式使用, 箱体表面采用聚脲喷涂工艺, 结实耐磨, 在左右两侧配置了四个力学优化式抽手, 让搬运及快速搭建工作变得更加简易便捷。
- ▶ WA18H adopted single 18-inch neodymium unit subwoofer matched with VK210, GTS28, GTS310 could be hanging or ground stacked. It use polyurea spraying technology, has four mechanical optimization handles for simple and convenient carry and installation

产品尺寸 Product dimension

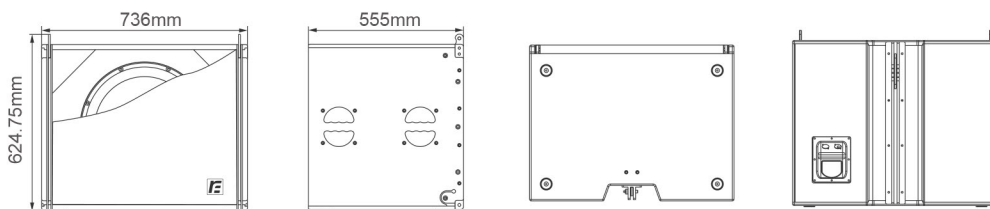

参数规格 Specifications

| | | | |
|--------------|------------------------------------|---------------------|------------------------------------|
| 系统类型 | 单18寸超低频音箱 | System type | Single 18" Subwoofer |
| 灵敏度(1W/1m) | 98dB | Sensitivity (1W/1m) | 98dB |
| 频率响应 | 40Hz-200Hz(±3dB)/35Hz~250Hz(-10dB) | Frequency response | 40Hz-200Hz(±3dB)/35Hz~250Hz(-10dB) |
| 额定功率(AES) | 1000W | Rated power(AES) | 1000W |
| 最大声压级(连续/峰值) | 128dB/134dB | SPL(continue/peak) | 128dB/134dB |
| 标称阻抗 | 8Ω | Nominal impedance | 8Ω |
| 低音单元 | 18寸钕磁超低音单元(100mm音圈) | LF Unit | 1×18" Neodymium (100mm Voice Coil) |
| 连接件 | 2×NEUTRIK NL4MP四芯插座, 1+1- | Connector | 2×NEUTRIK NL4MP 4 pin socket, 1+1- |
| 尺寸(H×W×D) | 624.75×736×555mm | Dimension: (H×W×D) | 624.72×736×555mm |
| 重量 | 55kg | Weight | 55kg |

