



应用范围 Application


- ▶ 会议厅、宴会厅、音乐吧、广场、礼堂、教堂、小型流动演出
- ▶ Conference hall, Banquet hall, Concert, square, Bistro, Church, small mobile performance

产品特性 Features

▶ VK205秉承了VK系列经典紧凑风格；同时，箱体采用了创新一体成型塑胶外壳设计，在拥有轻盈质感的同时兼具坚韧品质；高音采用1×1寸单元，搭配波导式指向号筒实现理想的线性波阵面覆盖；低音采用双5寸中低音单元，以高音为中轴水平对称式设计；箱体搭配三点式简易安装吊架件，两个力学优化式抽手，为扩声系统提供优质高性价比解决方案。

▶ VK205 is the classical compact style of VK series with the innovative integrated plastic shell design, which has the light texture and the tough quality at the same time. The high frequency driver adopts 1x1inch speaker unit and waveguide type directional horn to implement ideal line array coverage. The low frequency driver deploys a double 5 inch mid/low driver units and treble is designed as the axis of horizontal symmetry. The chest body is equipped with three-point simple installation hanger parts and two mechanical optimized pumping hands, rendering high-quality and cost-effective remedy for the sound reinforcement system.

产品尺寸 Product dimension

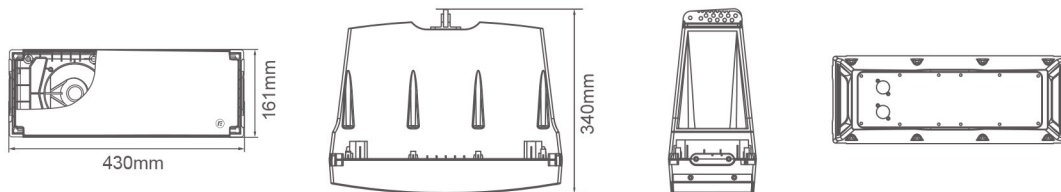

参数规格 Specifications

系统类型	双5寸二分频线阵列音箱	System type	Dual 5" Two-way line array speaker
频率响应	90Hz~20kHz(-10 dB)	Frequency response	90Hz~20kHz(-10 dB)
灵敏度(1w/1m)	95dB	Sensitivity (1w/1m)	95dB
标称阻抗	8Ω	Nominal impedance	8Ω
额定功率(AES)	120W	Rated power(AES)	120W
低音单元	2×5寸低音(30mm音圈)	LF	2×5" Low frequency driver(30mm aluminium voice coil)
高音单元	1×1寸高音(25mm音圈)	HF	1×1" High frequency driver unit(25mm aluminium voice coil)
覆盖角度(H×V)	100°×12°	Dispersion	100°×12°
最大声压级(连续/峰值)	115.5dB/121.5dB	SPL	115.5dB/121.5dB
分频点	2kHz	Crossover	2kHz
连接件	2×SPK4,四芯插座1+1-	Connectors	2×SPK4,NL4MP 1+1-
垂直角度调节	(0°-12°),间隔1.5°	Vertical angle adjustment	(0°-12°),Interval 1.5°
吊挂连接件	3处吊挂点	Hanging connector	3 Hanging points
尺寸(H×W×D)	161×430×340mm	Dimension(H×W×D)	161×430×340mm
重量	8kg	Weight	8kg

