

PC8

同轴单8寸二分频环绕音箱

Coaxial Single 8" Two-Way Surround Speaker

PC SERIES



应用范围 Application

▶侧环绕：不超过12米宽的影厅、后环绕：不超过17米深的影厅


▶Side surround: Available for area not more than 12m width; Back surround: Area not more than 17m depth.

产品特性 Features

▶PC8 是一款专门设计用于影院环绕声的8寸同轴全频音箱；选了一个44mm音圈1寸压缩单元，50mm音圈8寸中低频同轴单元；采用全新处理的铁振膜高音，同时满足了优秀听感和高功率低失真，音质细腻优美；同轴结构设计，有效解决了常规音箱单元间的传输路径差问题，远近场听感音色均匀一致。宽角的指数型高音号角，覆盖角达到100°(H)×100°(V)指向角度；分频器采用优质电容，优质散热设计的大功率无感电阻，纯铜空芯电感。


▶PC8 is an 8" coaxial speaker for cinema with a 44mm 1" speaker driver and 50mm 8" MLF speaker. The special design makes it excellent on sound and low distortion. The coaxial construction solve the problem of transfer difference between speaker drivers. The coverage angle is 100(H)×100(V).

产品尺寸 Product dimension

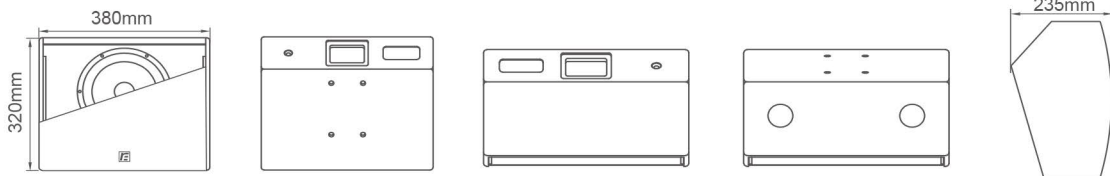

参数规格 Specifications

系统类型	同轴单8"二分频环绕音箱	System type	Coaxial single 8" two-way surround speaker
灵敏度(1W/1m)	88.5dB	Sensitivity(1W/1m)	88.5dB
频率响应	70Hz~20kHz(-10dB)	Frequency response	70Hz~20kHz(-10dB)
额定功率(AES)	180W	Power rating(AES)	180W
最大声压级(连续/峰值)	111dB/117dB	SPL(continue/peak)	111dB/117dB
标称覆盖角(H×V)	100°×100°	Dispersion(H×V)	100°×100°
标称阻抗	16Ω	Nominal Impedance	16Ω
低音单元	8"低音(50mm音圈)	LF	1×8" (50mm voice coil)
高音单元	1"压缩单元(44mm音圈)	HF	1" The compression unit (44mm voice coil)
连接插座	红正黑负接线座	Connectors	Red for positive ,black for negative
吊挂硬件	4×M8吊点	Fittings	4×M8 rigging point
尺寸(H×W×D)	320×380×235mm	Dimension(H×W×D)	320×380×235mm
重量	10kg	Net weight	10kg



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10,Shilou Section,Shilian Road,Panyu District,Guangzhou,Guangdong,China
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com