

VK10S

单18寸超低频音箱
Single 18" Subwoofer

VK SERIES




应用范围 Application

- ▶ 剧场、礼堂、演艺大厅主扩声、大会议厅、多功能厅主扩声、体育场馆扩声、中小型流动演出主扩声、大型扩声系统辅助扩声
- ▶ Stadium, Theatre, Auditorium, Banquet hall, Multi-function hall, Touring, Portable application

产品特性 Features

- ▶ VK10S单18寸超低频音箱与VK10线阵列音箱组合成三分频线阵列扬声器组;搭配VK10线阵列音箱组合吊挂使用,也可以地面堆叠式组合使用,三点吊挂,使音箱受力更均匀。
- ▶ Single 18" Subwoofer VK10S match with VK10 combined three-way line array speakers; can hang with VK10 or ground stacked.

产品尺寸 Product dimension

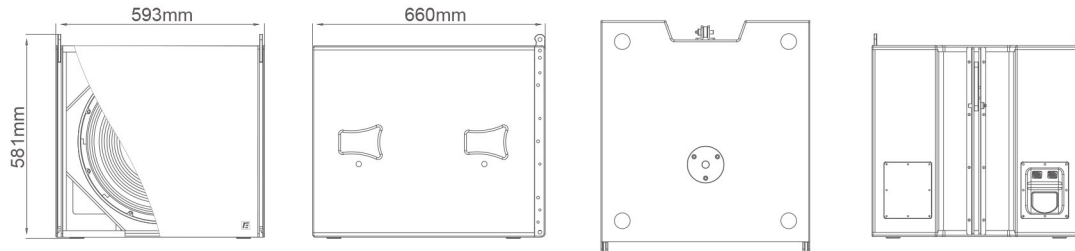

参数规格 Specifications

系统类型	单18寸超低频音箱	System type	Single 18" Subwoofer
灵敏度(1W/1m)	98dB	Sensitivity(1W/1m)	98dB
频率响应	40Hz~200Hz(±2dB)/30Hz~300Hz(-10dB)	Frequency response	40Hz~200Hz(±2dB)/30Hz~300Hz(-10dB)
额定功率(AES)	900W	Power rating(AES)	900W
最大声压级(连续/峰值)	127.5dB/132.5dB	SPL(continue/peak)	127.5dB/132.5dB
标称阻抗	8Ω	Nominal Impedance	8Ω
低音单元	18寸钕磁低音单元(100mm)	LF	1x18" Neodymium(100 mm Voice Coil)
连接件	2×NEUTRIK NL4MP四芯插座, 1+ 1-	Connectors	NEUTRIK NL4MP×2, 1+ 1-
尺寸(H×W×D)	581×593×660mm	Dimension(H×W×D)	581×593×660mm
重量	46kg	Weight	46kg



广州市锐丰智能科技有限公司 A:广东省广州市番禺区市莲路石楼路段10号
T:020-3928 0043 F:020-39280123-8014 E:info@rfintell.com Z:511447 www.rfintell.com

Guangzhou Ruifeng Intelligence Technology Co., Ltd Address: No.10,ShiLou Section,Shilian Road,Panyu District,Guangzhou,Guangdong,China
T:+86 2039280083 Mobile: +86 13609092324 F:+86-20-39280123-8014 E: mail:sales@rfintell.com Z:511447 www.rfintell.com